

Paragraph 09-15 Thailand on old through the electrical installation instructions



1. Remove the original car bracket, installation of upper bracket and brace, use our screws (or steps)



2. Remove the original car bottom bracket, installation, bottom bracket, with screws



3. The left hole, hole thread through the original car stopper on the card




1. Remove the original car bracket, installation of upper bracket and brace, use our screws (or steps)



2. Remove the original car right bracket, installation bracket at the lower right, with our screws




3. The right hole, hole thread through the original car stopper on the card

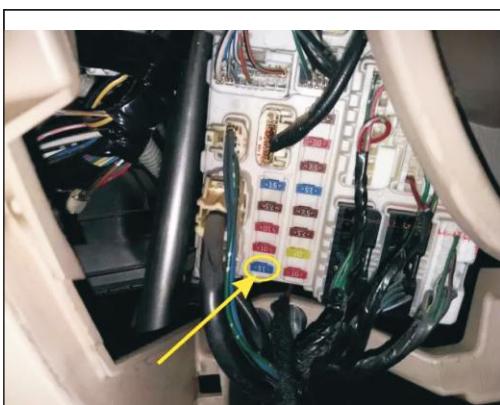

4. On the right side of the main driving 15 a fuse, unplug the original car plug in our power plug




5. Found at the bottom of the main driving ground, ground connection

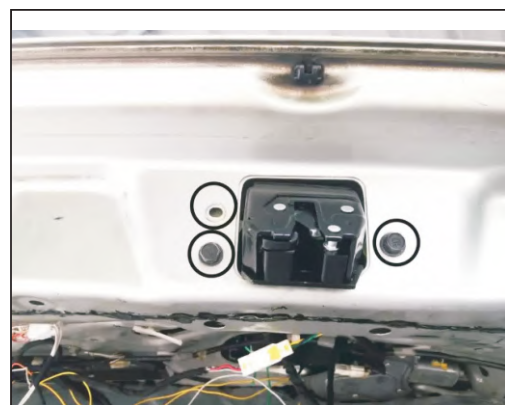

6. Abort the original screw, remove the original car door lock, installed on our electric absorption, use the original car screws




7. The electric socket absorption and tee harness to plug from the socket

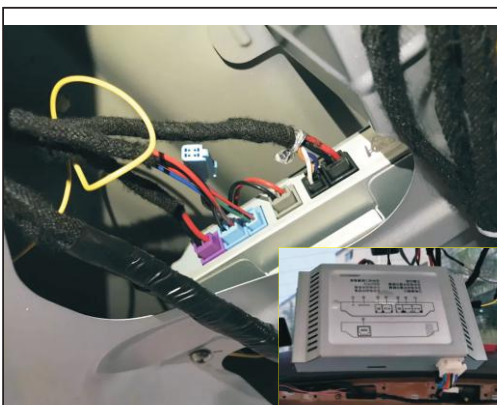

8. The hole line, power line, electric line plug according to the color of a pair of control box



9. Find the original car tail door keys, will we stand under the original car, with the original screw fixation

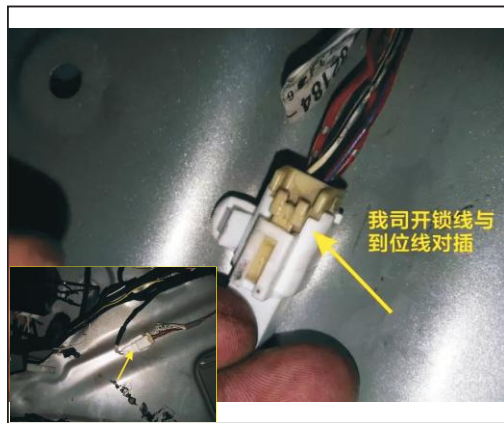

10. In the tail gate to find the original socket, we lock line socket



11. Remove the original rear door trim, install our stern door keys

| Fault phenomenon | Troubleshooting method |
|---|--|
| The original car remote control did not work | Yellow control line is connected |
| Not working after installation is complete | <ol style="list-style-type: none"> 1. Check whether the positive power supply is connected with 12V-16V 2. Check if the power line fuse is inserted 3. check whether the ground is connected |
| Guan Wei Men Pass not in place | <ol style="list-style-type: none"> 1. Whether the left and right brackets of the struts are installed in reverse 2. Whether the control box sockets are inserted well 3 whether the bracket is replaced with our special screws 4. There are two vinyl glues on the left and right sides of the original tailgate cover. |
| The original car remote controller cannot be closed | Whether there is learning after loading, the first time you need to install a car, you need to press the rear door.Press key to learn once |
| The tailgate can't go halfway up | <ol style="list-style-type: none"> 1. Whether the left and right brackets of the struts are installed in reverse 2. Whether the control box sockets are inserted well 3 whether the bracket is replaced with our special screws Disclaimer |